

Multi Max Paver Tilt MP1026PE

Standard Specs:

Capacity:	25,500 GVWR
Trailer Weight:	7,500 lb. (approx.)
Length:	26 ft.
Width:	102 in.
Bed Height:	33 in. from ground (approx.)
Tongue Length:	5 ft. pintle
Hitch Type:	4 bolt, 4 position pintle ring

Mainframe:	10 in. steel channel 15.3 lb. per ft.
Top Crossmember:	3 in. steel channel 4.1 lb. per ft.
Bottom Crossmember:	3 in. steel channel 4.1 lb. per ft.
Siderails:	5 in. steel channel 6.7 lb. per ft.
Stopsralls:	10 in. steel channel 15.3 lb. per ft.
Uprights:	10 in. steel channel 25 lb. per ft.
Outrights:	8 in. steel channel 11.5 lb. per ft.
Hangers:	Structural grade steel

Axles:	4 commercial grade independent 5,000 lb. MULTI MAX® - axles with axle alignment assemblies
Tires:	8.00 x 14.5 low profile tires with spare tire and wheel
Wheels:	8 lug
Brakes:	12 in. x 2 in. electric only
Springs:	Multi leaf

Flooring:	2 x 8 oak lumber secured with steel straps
Tie-downs:	4 in. x ¼ in. rub rails and 5 in. cut channel stake pockets
Ramp:	6 ft. spring assisted wood filled tapered
Jack:	12,000 lb. side wind drop leg jack
Plug:	Sealed wiring harness with 7 pin RV type plug

Available Options

◆ Partial stationary deck	◆ Winch plate	◆ Custom color choice
◆ Custom ramp length	◆ Power tilt	◆ Chain storage with locking lid
◆ Gooseneck hitch	◆ LED lighting package	◆ Custom bed length
◆ Steel tread plate decking	◆ Fork tubes	◆ Additional tongue length
◆ All Request Considered		

Miscellaneous Specs:

- Fracture resistant mig welding
- High tensile safety chains
- No HAPS environmentally friendly paint
- High visibility ECONOLINE yellow acrylic paint
- Emergency breakaway kit including battery
- All DOT required safety decals, lighting and
- conspicuity markings including tag light and holder




"Working Trailers for a Working World"

1-800-624-1866

www.econolinetrailers.com

MULTI MAX PAVER TILT

MP1026PE 25,500 LB. GVWR

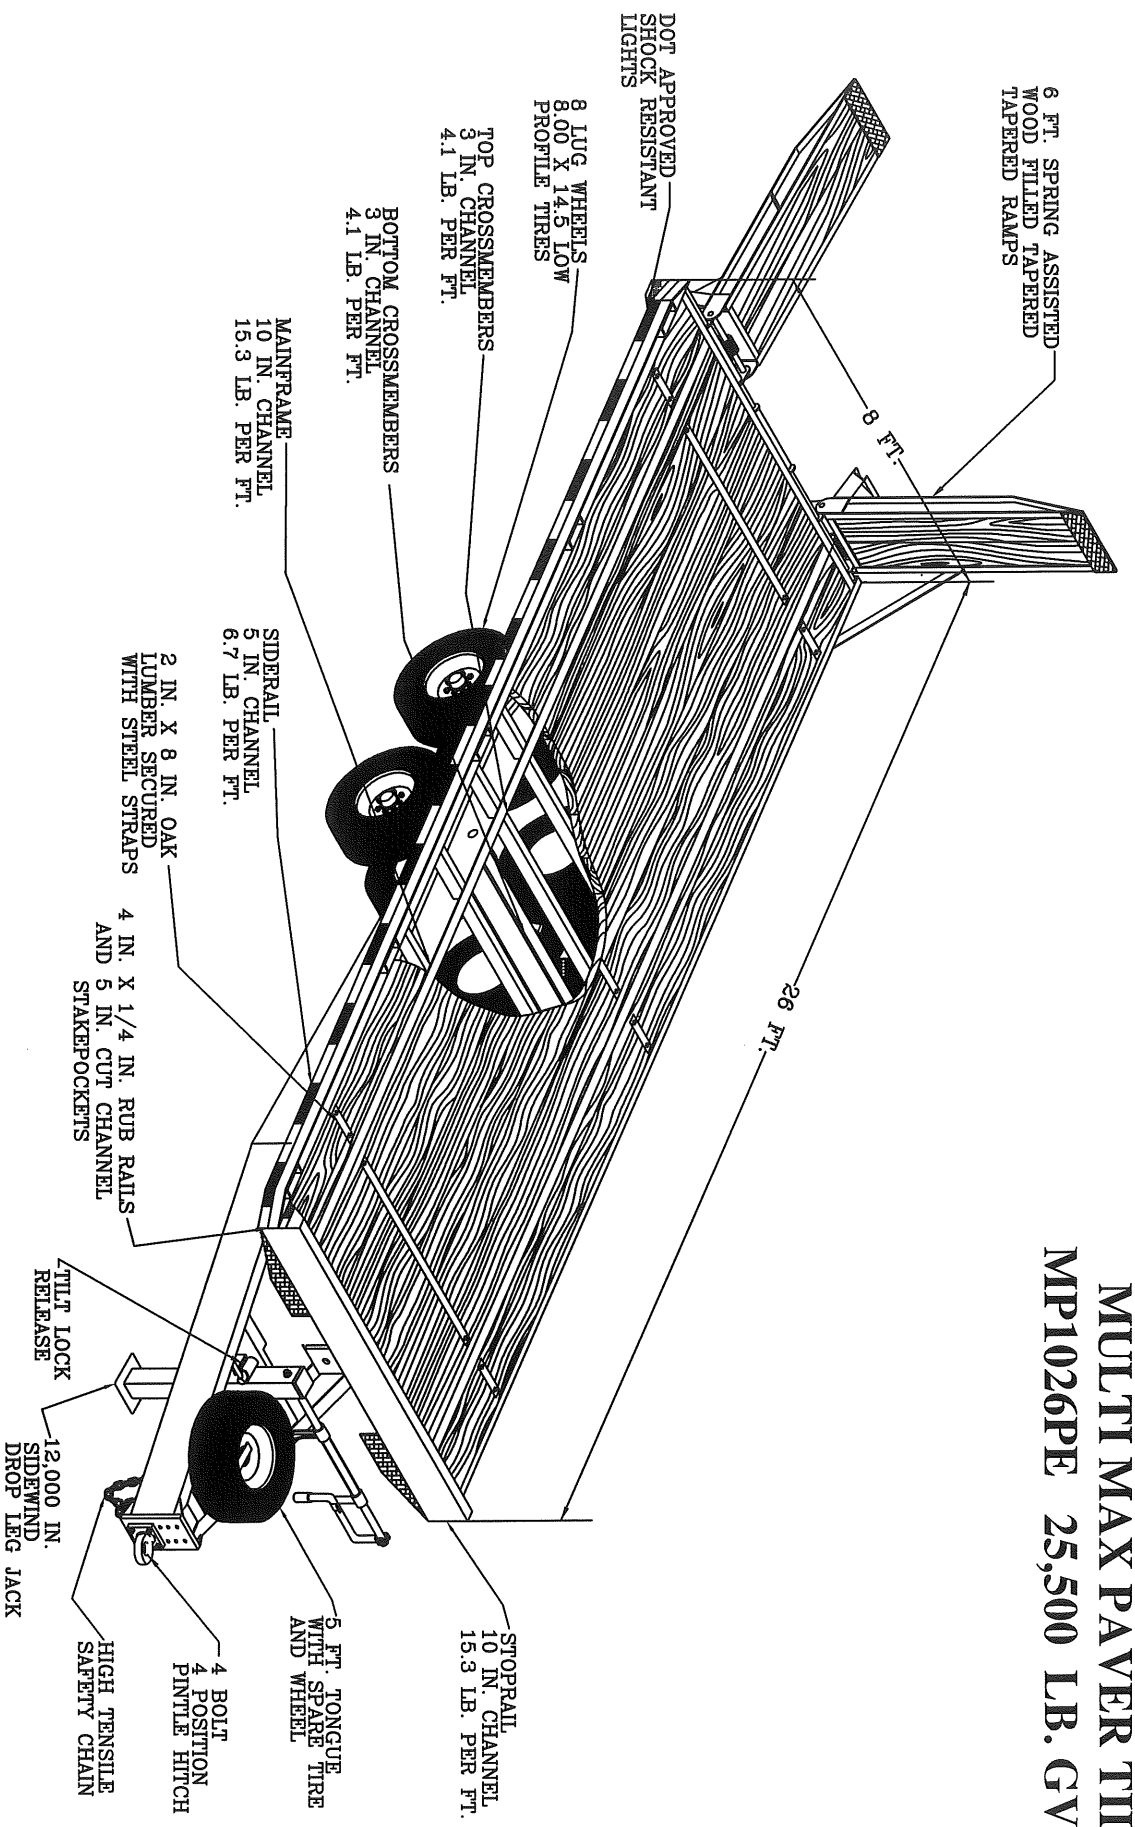


AVAILABLE OPTIONS:

- GOOSENECK HITCH
- WINCH PLATE
- POWER TILT
- CHAIN STORAGE WITH LOCKING LID
- PARTIAL STATIONARY PLATFORM
- DUAL OR TWO SPEED JACKS
- STEEL TREAD PLATE DECKING
- FORK TUBES
- LED LIGHTING PACKAGE
- CUSTOM COLOR CHOICE
- ALL REQUESTS CONSIDERED

MISCELLANEOUS SPECS:

- 12 IN. X 2 IN. ELECTRIC BRAKES
- (4) COMMERCIAL 5,000 LB. CAPACITY AXLES
- EMERGENCY BREAK AWAY KIT WITH BATTERY
- NO HAPS ENVIRONMENTALLY FRIENDLY PAINT
- HIGH VISIBILITY ECONOLINE YELLOW ACRYLIC PAINT
- FRACTURE RESISTANT MIG WELDING
- SEALED WIRING HARDNESS WITH 7 PIN RV TYPE PLUG
- DOT REQUIRED SAFETY DECALS, LIGHTING, AND CONSPICUITY MARKINGS INCLUDING TAG LIGHT AND HOLDER
- 34 IN. BED HEIGHT FROM GROUND (APPROX.)

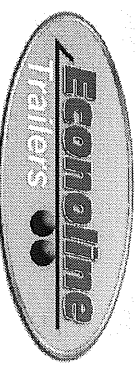

Double Springs, Alabama
 1-800-624-1866
 www.econolinetrailers.com

MP1026PE 07/01/07